	<b>Racor de poliamida HELICON</b>	REVISION: <b>04</b>
	<b>HELICON polyamide connector</b>	Fam.: <b>HCM</b>
		Pág. / Page <b>1/1</b>

INTERFLEX, S.A. c/Muga 1, Pol. Ind. Pla d'en Coll, Montcada i Reixac E-08110 · Tel: +34 935643112 · Fax: +34 935643700 · interflex@interflex.es · www.interflex.es

<b>DESCRIPCIÓN</b>	<b>DESCRIPTION</b>
<ul style="list-style-type: none"> <li>Racor para la fijación de tubos helicoidales de PVC.</li> <li>Material: Poliamida 6.6</li> </ul>	<ul style="list-style-type: none"> <li>Cylindrical connector to fix PVC helicoidal conduits</li> <li>Material: Polyamide 6.6</li> </ul>

**CARACTERÍSTICAS DIMENSIONALES / DIMENSIONAL CHARACTERISTICS**

**a) Rosca métrica / Metric Thread (EN60423)**


Referencia / Reference		Rosca / Thread	DN	GL	L	Ø A	Ø B	Ø d1	Ø d	Peso / weight g	Envase / Packing u.
Gris / Grey	Negro / Black										
921205	921247	M12x1,5	7	10	21	7.5	16.7	11.4	13.2	2.4	50
921605	921647	M16x1,5	9	10	21	11.0	19.2	13.4	15.8	2.8	50
922005	922047	M20x1,5	11	10	23	13.8	22.4	17.7	20.0	3.8	50
922006	922247	M20x1,5	13	12	25	15.8	24.8	18.8	21.7	4.4	50
922505	922547	M25x1,5	16	11	25	17.9	26.2	20.4	23.3	4.6	50
923205	923247	M32x1,5	21	10	29	20.9	32.8	25.8	29.0	11.4	50
924005	924047	M40x1,5	29	11	34	32.5	41.8	34.5	38.2	13.8	25
925005	925047	M50x1,5	36	14	39	40.6	53.2	41.8	47.1	31.4	10

Dimensiones en mm / Dimensions in mm

**b) Rosca Pg / Pg Thread (DIN40430)**

Referencia / Reference		Rosca / Thread	DN	GL	L	Ø A	Ø B	Ø d1	Ø d	Peso / weight g	Envase / Packing u.
Gris / Grey	Negro / Black										
920702	920760	Pg 7	7	10	21	7.5	16.7	11.4	13.2	2.4	50
920902	920960	Pg 9	9	10	21	11.0	19.2	13.4	15.8	2.8	50
921102	921160	Pg 11	11	10	23	13.8	22.5	17.5	20.0	3.6	50
921302	921360	Pg 13,5	13	10	25	15.7	24.6	18.8	21.6	5.2	50
921602	921660	Pg 16	16	11	25	17.8	26.3	20.4	23.2	4.4	50
922102	922160	Pg 21	21	10	30	21.0	32.9	25.9	29.0	9.2	50
922902	922960	Pg 29	29	11	34	29.3	41.8	34.5	38.4	14.2	25
923602	923660	Pg 36	36	14	36	39.5	53.4	42.6	47.3	27.4	10

Dimensiones en mm / Dimensions in mm

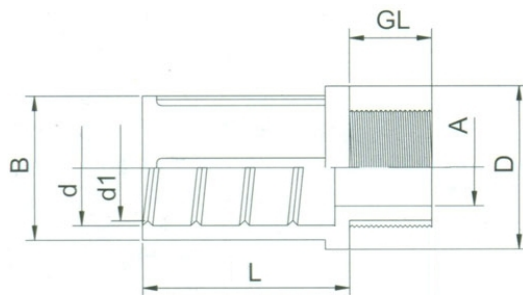

**OTRAS CARACTERÍSTICAS / OTHER CHARACTERISTICS**

- Grado de protección de hasta IP54 según norma UNE EN 20324 / Watertight up to IP54 according to UNE EN 20324 standard
- Rango de temperaturas / Temperature range:
  - Mínima / Minimum: -30°C
  - Máxima / Maximum: +120°C

La información contenida en esta Especificación Técnica de Producto se considera correcta en el momento de su publicación. Sin embargo, puede ser modificada sin previo aviso. El usuario deberá efectuar la selección adecuada del producto y la preparación necesaria para unas condiciones seguras en su aplicación. Es responsabilidad del usuario comprobar los productos recibidos y notificar inmediatamente a INTERFLEX, S.A. cualquier defecto. INTERFLEX, S.A. no será responsable de cualquier daño resultante de una mala instalación, aplicación o uso de sus productos. Si los productos de INTERFLEX, S.A. son utilizados conjuntamente con productos que no son de INTERFLEX, S.A., cualquier reclamación sobre el material en su conjunto será desestimada. Visite nuestra página web [www.interflex.es](http://www.interflex.es) para tener información actualizada.

The information provided in this Technical Data Sheet is considered to be true and correct at the time of publication. However, it may be changed without prior notice. It is the customer's obligation to determine the correct and safe selection, settings and conditions of use of the products. It is the customer's responsibility to check the delivered products and immediately notify INTERFLEX, S.A. of any detected fault. INTERFLEX, S.A. cannot be held responsible for any damage resulting from unprofessional installation, application or misuse of its products. If INTERFLEX, S.A. products are used in conjunction with non INTERFLEX, S.A. products, all product liability claims will be rejected. Visit our webpage [www.interflex.es](http://www.interflex.es) for an updated information.